



MICROCLI[®] RF CONTROL ACCESS CONTROL



8057
Receiver

8040
Receiver

Transmitters

HOMELINK[®] COMPATIBLE

- Keychain transmitter provides remote operation of garage doors or vehicular access gates
- Over 1,000,000 transmitter codes available
- PROxm[®] includes a built-in proximity card reader providing both RF and card access control into a single compact unit
- MicroCLI[®] RF controls may be used as a stand-alone access control system or can be interfaced with 26, 30 or 31-bit weigand controllers
- 2 year limited factory warranty

**GATED COMMUNITIES • APARTMENT COMPLEXES
• PARKING • CONDOMINIUM/RESIDENT HALL • MIXED USE
• COMMERCIAL • SELF STORAGE • MAXIMUM SECURITY**



Optional Visor Clip
use to mount transmitter in vehicle



Safety/Convenience
range up to 75 feet



Antenna Options
Directional antenna for fringe areas




Compatible
with Homelink[®] system


ACCESS CONTROL SOLUTIONS



MICROCLI[®]K RF CONTROL ACCESS CONTROL

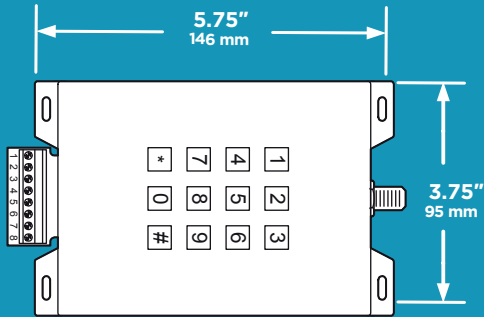

Receivers (keypad 8057 only)

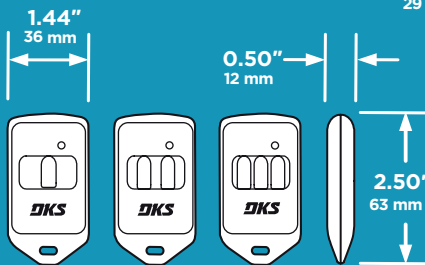

8066

8067

8068

	8040	8057
TYPE	Network / Stand-alone	Stand-alone
MAX CODES	5300 Network 100 Stand-alone	16,000
HISTORY BUFFER	N/A	2300 Events
TIME ZONES	N/A	10
SOLAR POWER MODE	Yes	No
OUTPUT	26, 30, 31-bit Wiegand / 1 Relay	1 Relay
POWER	12-24 VAC/DC	12-24 VAC/DC
RANGE	50-75 Ft	50-75 Ft

TECHNICAL FEATURES

RECEIVERS

Model 8057: Stand-alone receiver can support up to 16,000 transmitters and has a built-in keypad to easily add or delete transmitter codes.

Model 8040: Designed for interface with access controllers such as the DKS 1833, 1835, 1837, or 1838. Sends the received transmitter data to an access controller in 26, 30 or 31-bit wiegand formats. Supports up to 5300 transmitters. This receiver can also be used in a stand alone configuration that can store up to 100 transmitter codes.

The 8040 Receiver is also a low power draw unit designed specifically for the solar application. It remains in a "sleep" mode until it receives a signal from a transmitter. When in sleep mode, it draws about 1 milli-amp of power.

TRANSMITTERS

1,000,000 codes available

Available with 1, 2 or 3 buttons

Powered with a 12-volt, type 23A battery (replaceable)

Key ring included with transmitters

PROXmitters combine the MicroCLI[®]K transmitter with a built in proximity tag

PROXmitters are available with DK Prox, AWID, IDTeck or HID tags

Optional visor clips available

ELECTRICAL

Receivers - 12-24 volt AC or DC power

Transmitters - 12 Volt type 23A battery

Output

Model 8057 Receiver -

Dry contact form C relay (30V, 1A max)

Model 8040 Receiver -

26, 30 or 31-bit wiegand

Dry contact form C relay (30V, 1A max)

FCC (US): LSD8059RX

FCC (US): LSD69T

DOC (CAN): 1736 102 138

DoorKing[®], Inc.

Access Control Solutions since 1948



120 S. Glasgow Avenue,
Inglewood, California 90301 U.S.A.
Tel: 310-645-0023 FAX: 310-641-1586
www.doorking.com

© 2021 All Rights Reserved.
Product specifications may
change without notice. Rev. 5/21



MEMBER:



DISTRIBUTED BY:

