

SlideDriver™

Maximum security
combined with extreme
durability

The most secure slide gate operator with
power to move any gate, customizable
for every unique application.

Features:



Powerful:

Move gates up to 20,000 lb



Tough:

Secure steel chassis and tamper
resistant cover



Reliable:

UPS models remain functional
during a power outage



Programmable:

Configurable for specific site
requirements



Connected:

Remote monitoring, management,
and maintenance with optional
HyNet™ Gateway



Fast:

1 - 3 ft/s operating speed.
Emergency Fast Operate at 3 ft/s



Smart:

Integrated primary/secondary
controls and preprogrammed
relay settings



All weather performance:

Wide temperature range without
heater



Durable:

Decades long life and low
maintenance



Made in USA:

Designed, tested and built with
global materials



SlideDriver

Industrial and High Security



powered by
SmartTouch

Technical Specifications


	1,500 lb gates 1 ft/s	3,000 lb gates 1.7 ft/s	4,000 lb gates 1 ft/s	5,000 lb gates 2.2 ft/s or 3 ft/s	8,000 lb gates 1 ft/s	20,000 lb gates 1 ft/s
Model	SlideDriver 15	SlideDriver 30F	SlideDriver 40	SlideDriver 50VF2/3	SlideDriver 80	SlideDriver 200
Part #	222 SS ST	222 EX 1.7 ST	222 E ST	222 X3 ST	222 X1 ST	444 XS ST
Duty Cycle	Continuous					
Horsepower	1 hp UPS model: 2 hp	2 hp	1 hp UPS model: 2 hp	2 hp	2 hp	5 hp UPS model: 4 hp
Drive	Hydraulic					
Drive Wheels	Two 6 inch (15 cm) AdvanceDrive wheels	Two 6 inch (15 cm) AdvanceDrive wheels	Two 6 inch (15 cm) AdvanceDrive wheels	Two 8 inch (20 cm) AdvanceDrive wheels	One 8 inch (20 cm) AdvanceDrive wheel, One 8 inch XtremeDrive wheel and 27 ft (8 m) of rack	Two 8 inch (20 cm) AdvanceDrive wheels, Two 8 inch XtremeDrive wheels and 52 ft (16 m) of rack
Gate Weight Max.	1,500 lb (680 kg)	3,000 lb (1,361 kg)	4,000 lb (1,814 kg)	5,000 lb (2,268 kg)	8,000 lb (3,629 kg)	20,000 lb (9,072 kg)
Gate Length Max.	Limited only by weight					
Drawbar Pull	300 lb (136 kg)	300 lb (136 kg)	300 lb (136 kg)	300 lb (136 kg)	600 lb (272 kg)	1,200 lb (544 kg)
Rate of Travel	1 ft/s (30 cm/s)	1.7 ft/s (50 cm/s)	1 ft/s (30 cm/s)	Field adjustable, 2.2 ft/s (70 cm/s) or 3 ft/s (91 cm/s) Emergency Fast Operate 3 ft/s (91 cm/s)	1 ft/s (30 cm/s)	1 ft/s (30 cm/s)
Temperature Rating	-40° to 158° F (-40° to 70° C)					
1 Phase Power	115/208/230V 60 Hz 110/220V 50 Hz***	208/230V 60 Hz 220V 50 Hz***	115/208/230V 60 Hz 110/220V 50 Hz***	208/230V 60/50 Hz	208/230V 60 Hz 220V 50 Hz***	230V 60 Hz 220V 50 Hz***
3 Phase Power	208/230/460V; 220/380/440V 50Hz***			208/230V 60/50Hz or 380/460V 60/50Hz	208/230/460V; 220/380/440V 50Hz***	
Included Accessories	One premium EMX IRB-MON photo eye, one 5-foot premium ASO edge sensor and a pre-wired Hy2NC adapter					Pre-wired Hy2NC adapter
Communication	RS-232, RS-485, Ethernet/fiber using optional HyNet™ Gateway accessory					
User Controls	Smart Touch Controller with 70+ configurable settings, programmed via the keypad and display or a PC using S.T.A.R.T. software.					
Relay	Three configurable user relays: one 30VDC, 3A solid state and two 250VAC, 10A electromechanical; Optional Hy8Relay™ for 8 additional relay outputs					
Finish	Zinc plated with powder coating					
ETL Listed (UL 325)	Usage Class I, II, III, IV	Usage Class III, IV	Usage Class I, II, III, IV	Usage Class III, IV	Usage Class III, IV	Usage Class III, IV
Warranty	5 year w/product registration					

UPS Battery Backup Power and Additional Models

DC Power Supply* † with HyCharger DC	SlideDriver 15 UPS	SlideDriver 30F UPS	SlideDriver 40 UPS	-	SlideDriver 80 UPS	SlideDriver 200 UPS**
AC Power Supply with HyInverter AC*	SlideDriver 15 with HyInverter AC	-	SlideDriver 40 with HyInverter AC	SlideDriver 50VF2/3 with HyInverter AC	-	-
Correctional Facility Modular	-	SlideDriver 30F-C	SlideDriver 40-C	SlideDriver 50VF2/3-C	SlideDriver 80-C	SlideDriver 200-C
	SlideDriver 15-M	SlideDriver 30F-M	SlideDriver 40-M	SlideDriver 50VF2/3-M	SlideDriver 80-M	SlideDriver 200-M

* 3,000 ft/hr expected duty cycle. The operator's normal duty cycle and the actual number of gate cycles available from battery depends upon gate resistance to travel, cycle length, battery size, state of charge and health, ambient temperature, accessory power draw and frequency of gate cycles during power outage.
 ** SlideDriver 200 UPS has a 2,000 ft/hr (610 m/hr) expected duty cycle. Actual duty cycle depends on site specific conditions and gate configuration.
 *** Refer to Installed Options on pricing for all 50Hz voltages, which are special order.
 † 115V DC Power Supply requires a 30A branch circuit. Choose voltage with care as chargers are not field convertible.

Optional Accessories - See website for complete list

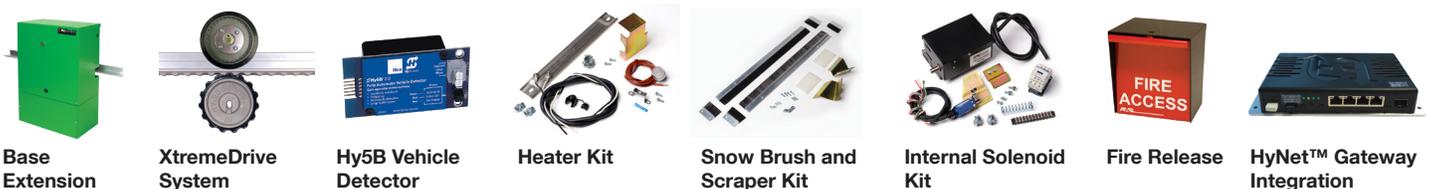

Base Extension

XtremeDrive System

Hy5B Vehicle Detector

Heater Kit

Snow Brush and Scraper Kit

Internal Solenoid Kit

Fire Release

HyNet™ Gateway Integration



Contact HySecurity for an operator/parts distributor near you.
 phone 253-867-3700 | 800-321-9947
 hysecurity.com | sales@hysecurity.com



D0504 121820